




EPOPLEX[®] LS90 - AKRON, OHIO

Project location: I-76 Gilchrist Road to County Road 18
Surface preparation: Removal by grinding
Material used: Epoplex LS90 Polyurea LF Yellow
Glass beads used: Potters Visibead Plus II[®] Swarco[®] 60/40 blend
Bead quantity: 10 lbs/gallon double drop
Installer: Century Fence Company
Surface: Concrete
Data collected by: Ohio Department of Transportation
Date of last reading: 5/12/05
Number of readings: White – 9 Yellow – 10
Instrument used: LTL 2000

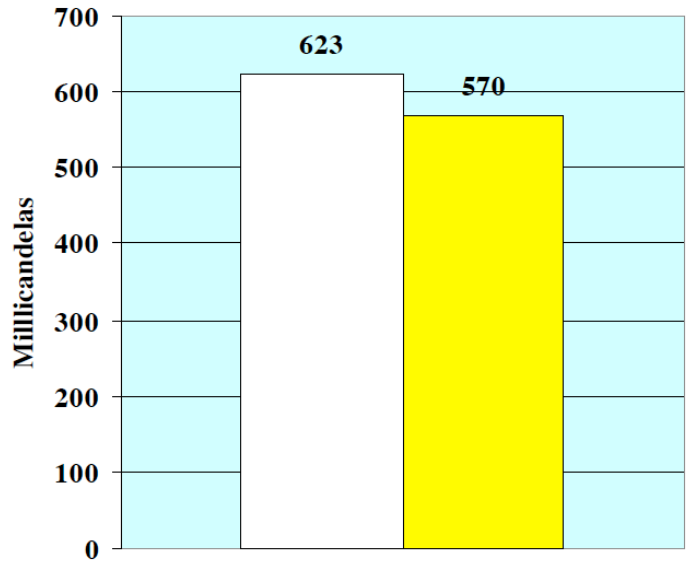

Average Readings

